


Tesla Bulbs

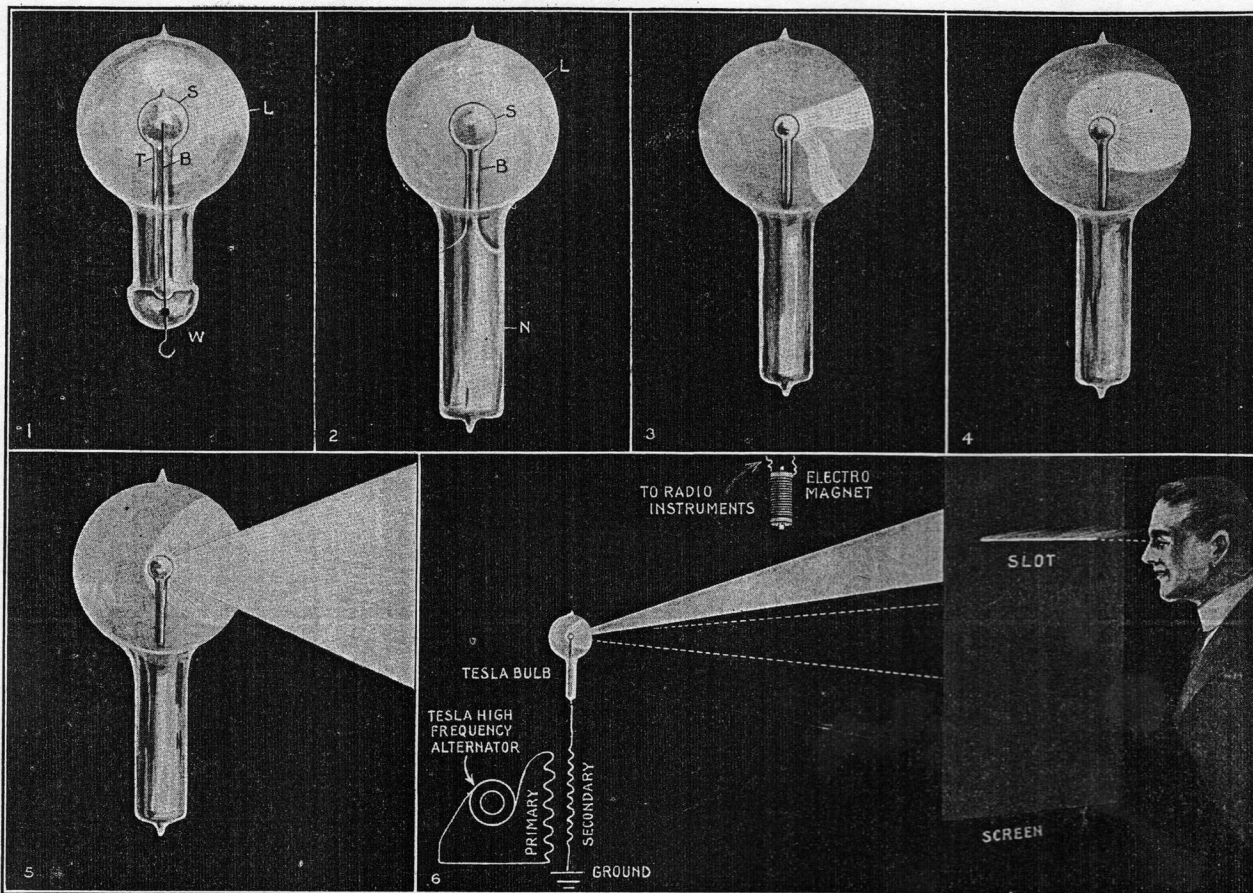

Early in Nikola Tesla's Researches—in Fact as Far Back as 1892—He Discovered a Most Peculiar and Wonderful Vacuum Bulb Phenomena. The Effect was That, Under Certain Critical Conditions, This Bulb Would Cause a Ray to Be Shot off in the Manner Shown, Which Ray Would Revolve or Oscillate Under the Influence of a High-Frequency Current and in Synchrony with It. By Utilizing This Principle, Dr. Tesla Believes It is Possible to Produce a Radio Detector More Sensitive Than the Audion or Fleming Valve.

IN the May issue in his article, "True Wireless," Nikola Tesla mentions the forerunner of the Audion, a Vacuum Bulb, which he used in his earlier experiments.

We have been in receipt of numerous letters from many individuals interested in this bulb who desire further particulars as to its operation, etc.

Accordingly, we publish herewith some excerpts from a lecture by Dr. Tesla delivered before the Institution of Electrical Engineers and Royal Institution, London, February, 1892.

"I think it best at this juncture to bring before you a phenomenon, observed by me some time ago, which to the purely scientific investigator may perhaps appear more interesting than any of the results which I have the privilege to present to you this evening.

"It may be quite properly ranked among the brush phenomena—in fact, it is a brush, formed at, or near, a single terminal in high vacuum.

"In bulbs provided with a conducting ter-

minal, tho it be of aluminum, the brush has but an ephemeral existence, and cannot, unfortunately, be indefinitely preserved in its most sensitive state, even in a bulb devoid of any conducting electrode. In studying the phenomenon, by all means a bulb having no leading-in wire should be used. I have found it best to use bulbs constructed as indicated in Figs. 1 and 2.

"In Fig. 1 the bulb comprises an incandescent lamp globe *L*, in the neck of which is sealed a barometer tube *b*, the end of which is blown out to form a small sphere *s*. This sphere should be sealed as closely as possible in the center of the large globe. Before sealing, a thin tube *t*, of aluminum sheet, may be slipped in the barometer tube, but it is not important to employ it.

"The small hollow sphere *s* is filled with some conducting powder, and a wire *w* is cemented in the neck for the purpose of connecting the conducting powder with the generator.

"The construction shown in Fig. 2 was chosen in order to remove from the brush any conducting body which might possibly

affect it. The bulb consists in this case of a lamp globe *L*, which has a neck *n*, provided with a tube *b* and small sphere *s*, sealed to it, so that two entirely independent compartments are formed, as indicated in the drawing. When the bulb is in use the neck *n* is provided with a tinfoil coating, which is connected to the generator and acts inductively upon the moderately rarefied and highly conducting gas inclosed in the neck. From there the current passes thru the tube *b* into the small sphere *s*, to act by induction upon the gas contained in the globe *L*.

"It is of advantage to make the tube *t* very thick, the hole thru it very small, and to blow the sphere *s* very thin. It is of the greatest importance that the sphere *s* be placed in the center of the globe *L*.

"Figs. 3, 4, 5, indicate different forms, or stages, of the brush. Fig. 1 shows the brush as it first appears in a bulb provided with a conducting terminal; but, as in such a bulb it very soon disappears—often after a few minutes—I will confine myself to the de-

(Continued on page 179)

**Experimenters—KNOBS
BASES — INSULATION**

Fine black composition base suitable for detector, fixed condenser, etc. The bottom has a cavity 3" x 1 1/2" x 3/8". Over all dimensions 4 1/4" x 2" x 1/2". Two holes for binding posts and two for fastening down to table. Post paid....30c



Knob 1 1/4 x 3/4
Hole through center for mounting.
Post paid 20c



Knob 11/16 x 21/32
With 8/32 brass threaded bushing.
Post paid 20c

Bakelite panels, about
9 x 19 x 1/4 Black XX..... \$4.00
19 x 19 x 1/4 Black XX..... 8.00
9 x 19 x 3/16 Black XX..... 3.00
19 x 19 x 3/16 Black XX..... 6.00

A. H. CORWIN & CO.
924 Kinney Building Newark, N. J.

Tesla Bulbs

(Continued from page 134)

scription of the phenomenon, as seen in a bulb without conducting electrode. It is observed under the following conditions:

"When the globe L (Figs. 1 and 2) is exhausted to a very high degree, generally the bulb is not excited upon connecting the wire *w* (Fig. 1), or the tinfoil coating of the bulb (Fig. 2) to the terminal of the induction coil. To excite it, it is usually sufficient to grasp the globe L with the hand. An intense phosphorescence then spreads at first over the globe, but soon gives place to a *white, misty light*. Shortly afterward one may notice that the luminosity is unevenly distributed in the globe, and after passing the current for some time the bulb appears as in Fig. 4. From this stage the phenomenon will gradually pass to that indicated in Fig. 5, after some minutes, hours, days or weeks, according as the bulb is worked. Warming the bulb or increasing the potential hastens the transit.


"When the brush assumes the form indicated in Fig. 5, it may be brought to a state of *extreme sensitiveness to electrostatic and magnetic influence*. The bulb hanging straight down from a wire, and all objects being remote from it, the approach of the observer at a few paces from the bulb will cause the brush to fly to the opposite side, and if he walks around the bulb it will always keep on the opposite side. It may begin to spin around the terminal long before it reaches the sensitive stage. When it begins to turn around, principally, but also before, it is affected by a magnet, and at a certain stage it is susceptible to magnetic influence to an astonishing degree. A small permanent magnet, with its poles at a distance of no more than two centimeters, will affect it visibly at a distance of two meters, slowing down or accelerating the rotation according to how it is held relatively to the brush. I think I have observed that at the stage when it is most sensitive to magnetic, it is not most sensitive to electrostatic, influence.

"When the bulb hangs with the globe L down, the rotation is always clockwise. In the southern hemisphere it would occur in the opposite direction, and on the equator the brush should not turn at all. The rotation may be reversed by a magnet kept at some distance. The brush rotates best, seemingly, when it is at right angles to the lines of force of the earth. It very likely rotates, when at its maximum speed, in synchronism with the alternations, say, 10,000 times a second. The rotation can be slowed down or accelerated by the approach or receding of the observer, or any conducting body, but it cannot be reversed by putting the bulb in any position. When it is in the state of the highest sensitiveness and the potential or frequency be varied, the sensitiveness is rapidly diminished. Changing either of these but little will generally stop the rotation. The sensitiveness is likewise affected by the variations of temperature. To attain great sensitiveness it is necessary to have the small sphere *s* in the center of the globe *L*, as otherwise the electrostatic action of the glass of the globe will tend to stop the rotation. The sphere *s* should be small and of uniform thickness; any dissymmetry of course has the effect to diminish the sensitiveness.

"The fact that the brush rotates in a definite direction in a permanent magnetic field seems to show that in alternating currents of very high frequency the positive and negative impulses are *not* equal, but that one always preponderates over the other.

"Of course, this rotation in one direction may be due to the action of the two elements of the same current upon each other, or to the action of the field produced by one of the elements upon the other, as in a

HB
16-Battery
Charging
Set



**CHARGING AUTO BATTERIES
will Pay \$150 to \$250
Clear Profit Every Month**

All you need is HB Equipment. The business is waiting for you—*right now*. More cars are being driven than ever before, with batteries to recharge, and all new Fords are equipped with storage battery. Start **NOW** to get these big steady profits.

**This HB 16-Battery Charger Can Be The
Biggest Money-Maker In Your Garage**

Recharge 1 to 16-volt batteries or equivalent in 12- or 24-volt batteries at once. Current cost 12 to 15c each. Owner pays 75c to \$1.50. Figure those profits. Compare them with other branches of your business! HB Chargers last for years—sturdy, economical, dependable. Finest materials and construction. Long service with *quick, clean, permanent profits*.

**\$57 Puts This Money-Maker in Your
Garage on Money-Back Guarantee**

Balance in 10 monthly payments of \$23 each. Earnings pay for machine. No electrical knowledge necessary to install or operate. Uses 2 or 3 phase city current. Furnished complete with 2 charging panels capable of charging 1 to 8 batteries each. No burn-outs or expensive renewals. Nothing to wear out or break. Sold on HB Absolute Money-Back Guarantee. Order now—you run no risk. Pin your \$57 Check to this ad and mail *today* for trial order.

Hobart Brothers Company, Box 6E, Troy, Ohio
Successful Manufacturers Since 1893.

PREPARED!

The lifting of the wireless ban finds the Newman-Stern Co. fully prepared to meet the increased needs of its customers.

Tremendous stocks of apparatus, wires and raw materials, accumulated and reserved for the day when amateur wireless would be resumed, now assure our customers **IMMEDIATE Service**.

Ninety-nine of every hundred orders will be shipped within twenty-four (24) hours following their receipt.

Present prices are in accordance with price-change schedule effective Feb. 20, 1919, applying to Catalog C-3.

Present prices on any item listed in Catalog B-2 (Handy-Book) will be quoted on request.

The Newman-Stern Co.
CLEVELAND, OHIO

**CHEMICALS
for THE EXPERIMENTER**



DON'T PAY FANCY PRICES for chemicals. Buy highest quality for lowest price. Our unique system of standardization guarantees you at all times the most for your money. Send today for interesting free booklet describing the money-saving, value-giving, N-S plan and listing hundreds of chemicals, chemical glass ware, and apparatus.

THIS RELIABLE MAIL ORDER HOUSE world famed for its wireless telegraph apparatus and experimenters' supplies, has been urged by hundreds of its patrons to establish a chemistry department. In answer we offer what we believe to be the most complete amateur experimental chemistry in the U. S. Buy where you are always assured of Standard Quality, Standard Quantity, Standard Packing, Standard Prices.



THE NEWMAN-STERN CO.
Department EE, CLEVELAND, O.

Not Toys But Real Apparatus

the same as used by all operating companies. You had better send us your order immediately to insure prompt delivery, as this equipment will not last long at these prices.

- 110 Volt Hand Generators..... 3 bars, each \$3.00
- 4 bars, each 4.00
- 5 or 6 bars, each 5.00
- Telephone transmitters with arms, each... .75
- Good ringers complete with bells, each... .50
- Telephone receivers, each... .75
- Condensers, 1/2 to 2 M.F., each... .50
- Induction coils, each... .50
- Relays, each... 1.50
- Repeating coils, each... 2.00
- Real complete C.B. wall type telephone... 4.50
- Slightly used dry cells, per dozen... 1.25

Please send money-order or cash with your order
ELECTRICAL SPECIALTY COMPANY
Dept. E, 48-50 So. Front St., Columbus, Ohio
Dept. E, 128 So. 11th St., Philadelphia, Pa.

**Commercial
Telegraph Apparatus
Bargains**

- Standard twenty ohm Telegraph Sounders at \$2.00 each
- Standard Telegraph Keys at 1.25 each
- 110 Volt A.C. Dynamos
- Three Bar..... 1.75 each
- Four Bar..... 2.25 each
- Five Bar..... 2.75 each

For other bargains see pages 90 & 91

Skinderviken Telephone Equipment Co.
Abbreviated Address
STECO-2118-2136 N. Clark St. CHICAGO

**Send To-day for the
"Electrical Worker's Friend"**

An electrical book of 66 motor drawings with complete instructions for rewinding and reconnecting A.C. motors. **\$3.50**
Special at Or write for full particulars of this valuable book.
SMITH & SMITH PUBLISHING CO.
1524 LOWRIE ST., N.S., PITTSBURGH, PA.

You benefit by mentioning the "Electrical Experimenter" when writing to advertisers.

110-V. TRANSFORMERS
8 Volt Secondary



Consumes so little current will not move ordinary meter.


\$1.00
 Postpaid

Only \$1.00

No. 10 gives 3 currents - 6, 12 and 18 volts secondary. Ideal for experimental work. A standard transformer, guaranteed. Complete with plug, \$2.00 postpaid. Order from this ad.

NATIONAL TRANSFORMER CO.,
 Dept. 13, 3124 No. California Ave., Chicago

Arnold Navy Model Loose Couple

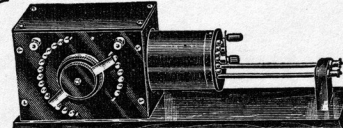

Literature describing the above and new apparatus is now ready. Also shows the line of accessories so much desired by the amateur.

My knobs are of real hard rubber; switch points, binding posts, etc., are perfect, polished and plated.

SPECIAL
 Round Dials for Condensers, Variometers, etc., made of hard rubber, the handsomest thing you can put on your set. Send 3c stamp for Bulletin.

J. F. ARNOLD
 2082 Lexington Ave. Near 125th St., N. Y.
 Established 1910

"The Livest Catalog in America"

Our big, new electrical cyclopedia No. 20 is waiting for you. Positively the most complete Wireless and electrical catalog in print today. 180 Big Pages, 500 Illustrations, 300 instruments and apparatus, etc. Big "Treatise on Wireless Telegraphy." 20 FREE coupons for our 160-page FREE Wireless Course in 20 lessons, FREE Cyclopedia No. 20 measures 7x5 1/4". Weight 1/2 lb. Beautiful stiff covers.

Send 6 cents in stamps or coin for which we will send our latest Cyclopedia Catalog No. 20 as described.

ELECTRO IMPORTING COMPANY
 231 Fulton St., New York City

TELEGRAPHY

Both wire and wireless, and Station Agency taught thoroughly and quickly, **BIG WAGES NOW PAID**, some of our recent graduates procuring \$138.00 per month to start. Great opportunities for advancement. Our school the oldest and largest—annual enrollment 600 students. Endorsed by railway, telegraph, wireless and government officials. Expenses low—chance to earn part. Catalog free. Write. **DODGE INSTITUTE, 22nd St. Valparaiso, Ind.**

WIRELESS IS SIMPLE

when the Summers' theories of wireless are applied to wireless systems, transmitting and receiving apparatus. Will advance the wireless art by leaps and bounds. Get on the right track with your experiments. This booklet should be in every home and school. United States and foreign copyrights. Price \$2.00 registered postpaid to any part of the world.

Address **FRANK E. SUMMERS, Memphis, Mo.**

TELEGRAPHY AND RADIO

DAY AND EVENING CLASSES
 SEND FOR PROSPECTUS
 IN SUBJECT INTERESTED

EASTERN RADIO INSTITUTE
 899-B Boylston St. Boston, Mass.

FRENCH WIRELESS



FRQG made of steel with large clicker inside, used to learn telegraphy. GREAT FUN. SEND YOUR FRIENDS WIRELESS MESSAGES. SENT complete with code, and to make a big bundle we will send a Ford joke book. Parlor games, etc., all for 10c.

10c

Dept. 72, American Toy Co., Lowell, Mass., U.S.A.

series motor, without necessarily one impulse being stronger than the other. The fact that the brush turns, as far as I could observe, in any position, would account for this theory. In such case it would turn at any point of the earth's surface. But, on the other hand, it is then hard to explain why a permanent magnet should reverse the rotation, and one must assume the preponderance of impulses of one kind.

"As to the causes of the formation of the brush or stream, I think it is due to the electrostatic action of the globe and the dissymmetry of the parts. If the small bulb s and the globe L were perfect concentric spheres, and the glass thruout of the same thickness and quality, I think the brush would not form, as a tendency to pass would be equal on all sides. That the formation of the stream is due to an irregularity is apparent from the fact that it has the tendency to remain in one position, and rotation occurs most generally only when it is brought out of this position by electrostatic or magnetic influence. When in an extremely sensitive state it rests in one position, and most curious experiments may be performed with it. For instance, the experimenter may, by selecting a proper position, approach the hand at a certain considerable distance to the bulb, and he may cause the brush to pass off by merely stiffening the muscles of the arm. When it begins to rotate slowly, and the hands are held at a proper distance, it is impossible to make even the slightest motion without producing a visible effect upon the brush. A metal plate connected to the other terminal of the coil affects it at a great distance, slowing down the rotation often to one turn a second.

"I am firmly convinced that such a brush, when we learn how to produce it properly, will prove a valuable aid in the investigation of the nature of the forces acting in an electrostatic or magnetic field. If there is any motion which is measurable going on in the space, such a brush ought to reveal it. It is, so to speak, a beam of light—frictionless, devoid of inertia.

"I think that it may find practical applications in telegraphy. With such a brush it would be possible to send dispatches across the Atlantic, for instance, with any speed, since its sensitiveness may be so great that the slightest changes will affect it. If it were possible to make the stream more intense and very narrow, its deflections could be easily photographed.

"I have been interested to find whether there is a rotation of the stream itself, or whether there is simply a stress traveling around the bulb. For this purpose I mounted a light mica fan so that its vanes were in the path of the brush. If the stream itself was rotating the fan would be spun around. I could produce no distinct rotation of the fan, altho I tried the experiment repeatedly; but as the fan exerted a noticeable influence on the stream, and the apparent rotation of the latter was, in this case, never quite satisfactory, the experiment did not appear to be conclusive.

"I have been unable to produce the phenomenon with the disruptive discharge coil, altho every other form of these phenomena can be well produced by it—many, in fact, much better than with coils operated from an alternator.

"It may be possible to produce the brush by impulses of one direction, or even by a steady potential, in which case it would be still more sensitive to magnetic influence."

Fig. 6 shows a practical application of the Tesla bulb. The bulb itself, as will be seen, is excited by means of a Tesla high frequency alternator which, in turn, is connected to the primary of a transformer. The secondary of the transformer is grounded at one end, while the other end of the transformer connects with the Tesla bulb.

Dr. Tesla, in an interview, stated that
 (Continued on page 184)

USE HB BALL BEARING ELECTRIC MOTORS

HB Electrical Motors Save Power—Get Ball Bearing equipped HB Motors, as they save you a substantial sum each month on your power bills. Absolutely they are trouble-proof, economical, amply designed, just right for your requirements—one to 15 h.p. They substantially lower your power costs. Easy to install and operate. Require practically no attention.

\$20.00 gives you an HB Ball Bearing Motor. The balance on easy terms. Suits your requirements. Let our engineering department advise you. Send in your problems. State all machinery you wish to run and type of current available. We can also furnish Battery Charging Outlets, Lighting Generators, etc. Pin this ad to your letterhead and mail for further information today.



HOBART BROTHERS COMPANY
 Box 6E Troy, Ohio
 Successful Manufacturers Since 1888

SMALL ENGINES

Perfect Gasoline Engines—1/2, 1 and 1 1/2 h.p.—for Farm and Shop. Price, \$27.50 and up. Also, WASHING MACHINES. We ship on trial. Send for Booklet and Special Offer: SIEVERKROPP ENGINE CO. 1401-19th St., Racine, Wis.

STARTER for FORD CARS




Yankee Wireless 50c

The only dependable wireless set at a low price. It is not a toy and with little practice you can send and receive clear messages anywhere as quick as a flash.

THE YANKEE

is for two complete stations—with Morse code and instructions for operating. We will also include our picture code attachment, which will enable the operator to send and receive pictures and photographs by wireless. The complete Yankee Wireless set can be obtained only from us. All charges paid for shipping and handling.

A. & B. MFG. CO., 1303 Peoria St., Chicago, Ill.



DOLLAR ADDING MACHINE

Adds and multiplies with speed of expensive machines. Seven columns capacity. Remarkably simple in construction. Nothing to get out of order. Weight one lb.

ounce. Made of metal and celluloid. The ideal pocket desk or home machine. Order today. The best way not to forget is to do it now.

L. J. LEISHMAN CO., Dept. 142, Ogden, Utah



MARKO STORAGE BATTERIES ARE GOOD—TRY ONE

Paul M. Marko & Co., Inc.
 1402-1412 Atlantic Ave. Brooklyn, N. Y.

SELENIUM CELLS

Guaranteed 99% pure selenium

Made by people who know their business, for the most difficult work, requiring very sensitive, quick acting cells.

Special cells to order.

THE SELENIUM LABORATORIES,
 New York Offices, 56 West 45th St.

WIRELESS BOOKS

Send for CATALOGUE and BUY NOW and Save a Dollar

By F. E. Bucher
 and the WIRELESS AGE for one year, \$2.75. Regular price, \$3.75.

WIRELESS PRESS, INC., 33 ELM ST., NEW YORK.

"BOW LEGS and KNOCK-KNEES" UNSIGHTLY

Send for booklet showing photos of men with and without the PERFECT LEG FORMS.

PERFECT SALES CO.
 140 N. Mayfield Ave., Dept. 50 Chicago, Ill.



INSYDE TYRES Inner Armor

for Auto Tyres. Double mileage, prevent blow-outs and punctures. Easily applied in any tire. Thousands sold. Details free. Agents wanted.

Amer. Accessories Co., Dept. 52, Cincinnati



ADVERTISING PAYS


It pays the man who advertises and it pays the man who answers ads. For advertising rates in the E. E. advertiser Advertising Dept., 233 Fulton St., N. Y.

"The National Authority on Electric Wiring for Twenty-Five Years"

All You Need to Know About Wiring

is in the Latest Edition of

"Standard Wiring"

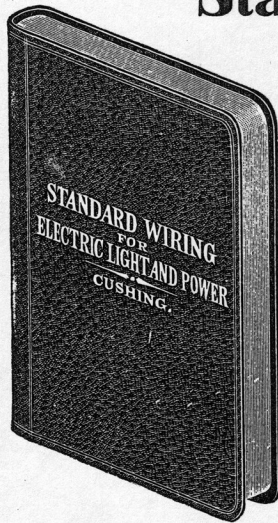

THIS year's edition, completely revised to date, is the only accurate book on electric light and power wiring and construction published.

The National Electrical Code, with all its new rules, is explained and illustrated. 52 of the latest and simplest tables which show, at a glance, just what size of wire is needed for any kind and size of lighting or motor installation, for any voltage, current and drop desired for any system. Direct Current, Alternating Current, single, two or three-phase. The latest Code Rules on grounding required on all work.

How to install and operate generators, motors and every kind of wiring device with diagrams of connections. Special chapters on illumination, House Wiring, Electrical Units and their Equivalents. The latest lamp data. Proper symbols to use to indicate outlets, etc., etc.

It Will Make You an Expert Wireman

Leather Cover - Pocket Size - 375 Pages - Price \$1.50

Sent to any address, postpaid, on receipt of price

H. C. Cushing, Jr., 10 West 40th St., New York

Tesla Bulbs

(Continued from page 180)

the best way to use the bulb for such experiments is when the shaft of light is in the position as shown in Figs. 5 and 6, at rest, but in a state of equilibrium inconceivably delicate. This is fully described above in Dr. Tesla's lecture. The inventor states that in such a condition, the shaft of light is marvelously sensitive to magnetic disturbances. Dr. Tesla informs us that a toy permanent horseshoe magnet not longer than 1/2" and with its poles 1/8" apart could with ease throw the shaft of light out of its normal direction across the whole room. In our illustration, an electromagnet is shown a few inches away from light ray, and we can imagine a slot in a screen in such a way that normally no light falls thru it. If, however, very faint radio-telegraphic impulses surge thru the electromagnet, the light ray will immediately become displaced, and will fall into the slot. Inasmuch as this shaft of light has no inertia, it will follow exactly the dot and dash impulses surging thru the electromagnet, no matter how rapidly they take place. They can then either be read off by the eye, or if desired, can be registered upon a fast moving film. This method will, of course, only be used where the transmission is made at high speed, and where it would be impossible for an operator at the receiving end to follow the dots and dashes with the eye.

The method shown by us in Fig. 6, of course, represents only one. Many others can undoubtedly be evolved to use the Tesla bulb to advantage.

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACT OF CONGRESS OF AUGUST 24, 1912, of Electrical Experimenter, published monthly at New York, N. Y., for April 1, 1919.

State of New York, County of New York--ss. Before me, a Notary Public in and for the State and county aforesaid, personally appeared Hugo Gernsback, who, having been duly sworn according to law, deposes and says that he is the Editor of the Electrical Experimenter, and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, embodied in section 443, Postal Laws and Regulations:

1. That the names and addresses of the publisher, editor, managing editor, and business manager are: Publisher, The Experimenter Publishing Co., 233 Fulton Street, New York City; Editor, Hugo Gernsback, 233 Fulton Street, New York City; Managing Editor, Harry Winfield Secor, 233 Fulton Street, New York City; Business Manager, Hugo Gernsback, 233 Fulton Street, New York City.

2. That the owners are: Experimenter Publishing Co., 233 Fulton Street, New York City; Hugo Gernsback, 233 Fulton Street, New York City; Sidney Gernsback, 233 Fulton Street, New York City; Mrs. K. Hymes, 233 Fulton Street, New York City; Harry Winfield Secor, 233 Fulton Street, New York City.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: None.

4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but, also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

5. That the average number of copies of each issue of this publication sold or distributed, through the mails or otherwise, to paid subscribers during the six months preceding the date shown above is—(Required only of daily publications.)

(SEAL) H. GERNSBACK.
Sworn to and subscribed before me this 4th day of April, 1919.


BEATRICE K. OWEN.
(My commission expires March 30, 1921.)

YOUR OPPORTUNITY

Canceled Government Contracts

We have secured a large quantity of Small Motors, Generators and Charging Outfits. This material is new, still in original cases and carries the full factory guarantee.

This is Your Opportunity to buy new, guaranteed Electrical Apparatus of Standard Manufacture




Battery Charging Outfits

For use on 110 volt, A. C., 60 cycle, single phase current only.

- 80 watts, 8 volts, 10 amperes . . . \$48.50
- 150 watts, 30 volts, 5 amperes . . . \$68.50
- 160 watts, 15 volts, 10 amperes . . . \$68.50
- 300 watts, 30 volts, 10 amperes . . . \$94.50

All outfits complete with switch-board as cut shown.



1/2

H. P. INDUCTION MOTOR
110 or 220 volts, A. C., 60 cycle, single phase, 1750 R. P. M.

\$32.50

ALL MOTORS COMPLETE AS CUT



1/4

H. P. 110 volts A. C., 60 cycle, single phase 1750 R. P. M.

WASHING MACHINE MOTOR

Suitable for operating Small Compressors, Coffee Grinders, Bottle Washers, Lathes Drill Presses, etc.

\$18.50

Mail \$5.00 cash or Money Order. We will send C. O. D. subject to full examination.
MONEY BACK GUARANTEE

WRITE FOR CATALOGUE. BARGAINS IN MOTORS AND GENERATORS. SPECIAL QUANTITY PRICES

220 volts 1750 RPM.
POLYPHASE MOTORS
60 cycle, 2 or 3 phase. Complete, pulley and base
1 H. P. \$59.50 3 H. P. \$84.50
2 H. P. \$72.50 6 H. P. \$102.50

110-220 volts 1800 RPM.
REPULSION MOTORS
60 cycle, single phase. Complete with pulley.
1/2 Hp. \$44.50 1 Hp. \$67.50

MANUFACTURERS' DISTRIBUTER
CHAS. H. JOHNSTON - West End - PITTSBURGH, PA.

What 15c will bring You from the Nation's Capital

Washington, the home of the Pathfinder, is the nerve center of civilization; history is being made at this world capital. The Pathfinder's illustrated weekly review gives you a clear, impartial and correct diagnosis of public affairs during these strenuous, epoch-making days.

which is sincere, reliable, entertaining, wholesome, the Pathfinder is yours. If you would appreciate a paper which puts everything clearly, fairly, briefly—here it is. Send 15c to show that you might like such a paper, and we will send the Pathfinder on probation 13 weeks. The 15c does not repay us, but we are glad to invest in new friends. **The Pathfinder, Box 576, Washington, D. C.**

The little matter of 15c in stamps or coin will bring you the Pathfinder 13 weeks on trial. The Pathfinder is an illustrated weekly, published at the Nation's center, for the Nation; a paper that prints all the news of the world and tells the truth and only the truth; now in its 26th year. This paper fills the bill without emptying the purse; it costs but \$1 a year. If you want to keep posted on what is going on in the world, at the least expense of time or money, this is your means. If you want a paper in your home

You benefit by mentioning the "Electrical Experimenter" when writing to advertisers.